

# CROSSOVER<sup>®</sup>

by Wascomat

**In a class by itself** – *The world's first small chassis dryer engineered to commercial laundry standards for your business needs.*

## PROFESSIONAL SPECIFICATIONS

Serving the Multi-housing and Coin Laundry markets, Crossover Series dryers meet business demands with durability, energy savings and customer satisfaction.

## FEATURES AND BENEFITS

- ✓ Commercial grade construction
- ✓ 22+ lb capacity
- ✓ 7 1/2 cu ft drum
- ✓ Stainless steel non-removable lint screen
- ✓ Tapered sealed ribs bring load forward improving dryer performance
- ✓ Axial airflow
- ✓ Extra large door and door opening
- ✓ Roller supported tumbler
- ✓ Fast drying

## BEST CUSTOMER EXPERIENCE

- ✓ Axial airflow ensures the shortest drying time
- ✓ Easy clean lint screen
- ✓ Loading and unloading are easy with the extra large door opening
- ✓ Large capacity tumbler can handle oversized loads

## MARKET READY DESIGN

- ✓ Coin and card payment compatibility
- ✓ Space-saving design
- ✓ Easy to install
- ✓ Meets ADA regulations



### MODEL NOS:

METERED—GAS  
Model No. # DAWFOGM

CARD READY—GAS  
Model No. # DAWFOGMD

METERED—ELECTRIC  
Model No. # DAWFOEM

CARD READY—ELECTRIC  
Model No. # DAWFOEMDC

NOTE: Money boxes are sold separately

# Laundrylux<sup>®</sup>


866.580.1010 ✓ [laundrylux.com](http://laundrylux.com)



# CROSSOVER DRYER

## CROSSOVER DRYER SPECIFICATIONS

<b>Model No.</b>	Metered/Card Ready - Gas DAWFOGM/DAWFOGMDC
<b>Model No.</b>	Metered/Card Ready - Electric DAWFOEM/DAWFOEMDC
<b>Motor</b>	1/3 HP
<b>Electrical Rating (Gas Model)</b>	120V/60Hz/1-phase
<b>Electrical Rating (Electric Model)</b>	208-240V/60Hz/1-phase
<b>Breaker/Fuse Requirements (Gas Heat)</b>	15A
<b>Breaker/Fuse Requirements (Electric Heat)</b>	30A
<b>Cylinder Volume</b>	7 1/2 cu ft (212 liters)
<b>Cylinder Diameter</b>	25 3/4 in (654 mm)
<b>Cylinder Depth</b>	24 in (609 mm)
<b>Capacity (Dry Weight)</b>	22 lbs (10 kg)
<b>Door Opening</b>	17 1/4 in (438 mm)
<b>Airflow</b>	220 cfm (373 m <sup>3</sup> /h)
<b>Gas Heating</b>	26,000 Btu/hr (6,550 kcal/hr)
<b>Gas Connection</b>	3/8 in MNPT
<b>Tumbling Speed</b>	50 RPM
<b>Exhaust Connection</b>	4 in dia.
<b>Approximate New Weight</b>	176 lbs (79.8 kg)
<b>Approximate Shipping Weight</b>	198 lbs (89.8 kg)
<b>Overall Dimensions</b>	W D H: 27 1/8 x 31 3/4 x 45 3/4 in W D H: 686 x 807 x 1162 mm

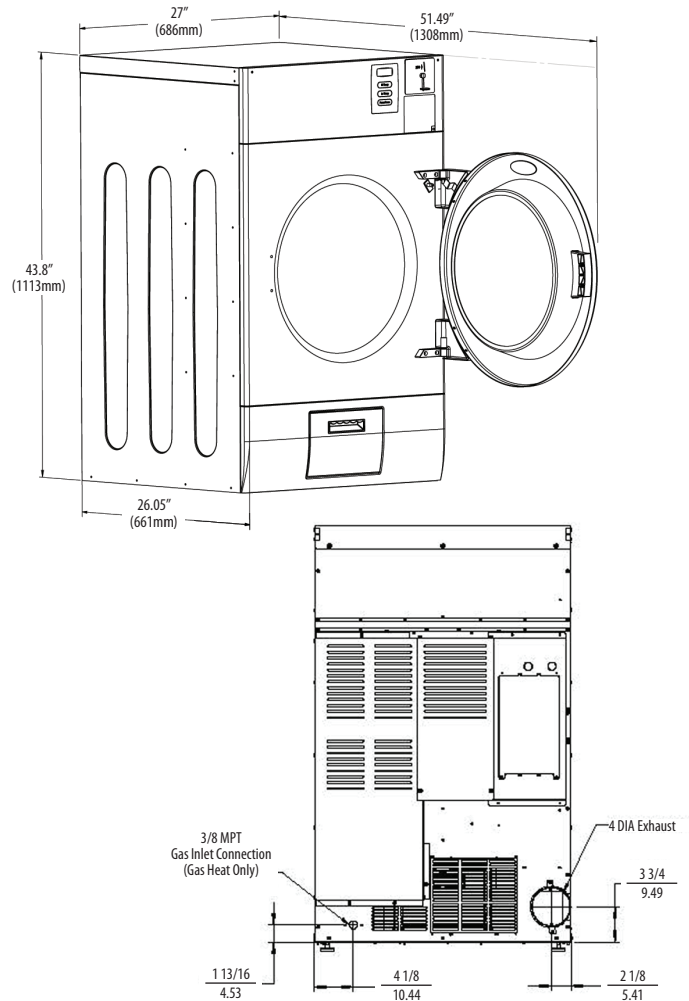

Refer installation and servicing to qualified, licensed personnel. Always read Installation and Operating Manuals and consult local codes before installation. Protect machines with properly rated circuit breakers ONLY. Warranty void if not properly installed. Specifications subject to change without notice. Laundrylux assumes no responsibility for errors or omissions in this information.

# Laundrylux®

866.580.1010 ✓ [laundrylux.com](http://laundrylux.com)

Laundrylux • 461 Doughty Blvd., Inwood, NY 11096  
 Sales and Administration Tel: 516-371-4400 • Fax: 516-371-4204 • [sales@laundrylux.com](mailto:sales@laundrylux.com)  
 Spare Parts Tel: 516-371-2000 • Fax: 516-371-4029 • [parts@laundrylux.com](mailto:parts@laundrylux.com)  
 Technical Support – Tel: 516-371-0700 • Fax: 516-371-4029 • [service@laundrylux.com](mailto:service@laundrylux.com)  
 En Mexico: Llame gratis a este numero 001-800-010-1010

*Laundrylux offers a complete line of  
 Electrolux Professional and Wascomat  
 Commercial Laundry equipment.*