

## MULTI-HOUSING

Speed Queen®  
Commercial Washers & Dryers

PUSH-TO-START

**Speed Queen®**



# BUILT FOR **RELIABLE** PERFORMANCE.

Our manual control line features top loaders that offer the flexibility of selecting hot, warm and cold wash temperatures and two-speed wash and spin actions. Our single load and stack dryers have four heat/cycle options and time start activation. These units are ideal for military, colleges, restaurants, beauty salons and other special business applications.


PUSH-TO-START MACHINES PROVIDE:

- Easy push-to-start activation indicated by "In Use" light.
- Durable porcelain enamel tops and lids resist corrosion and scratching.



## **TOP LOAD** WASHER

The Speed Queen push-to-start operated top load washer gives building owners and property managers unparalleled ability to reduce water and energy costs. The top load washer has met every design standard to be Department of Energy compliant to commercial washer standards for energy and water savings.

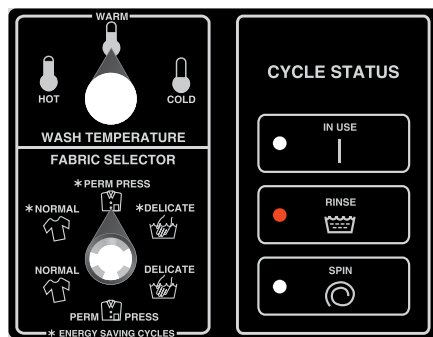

### FEATURES

#### HIGH SPEED EXTRACT

710 RPM final spin to maximize moisture removal from clothes.

#### AUTOMATIC BALANCING SUSPENSION SYSTEM

ABS provides the industry's best out-of-balance handling, completing wash cycles without interruption.


#### DURABLE STAINLESS STEEL AND PORCELAIN ENAMEL WASH TUB

#### FOUR-VANE POLYPROPYLENE AGITATOR

210° agitation stroke delivers superior washability for all load sizes.

# SINGLE LOAD DRYER

Speed Queen's single load dryers combine heavy-duty construction with reliable operation proven to stand the test of time. They're designed with less moving parts for one reason: so you'll face fewer maintenance problems and less wear and tear down the road. Our cabinet design maintains the perfect balance of heat, airflow and tumble action for optimal performance and efficiency. The dry cycle is efficient and fast with settings from 0 to 60 minutes available. Customers have the flexibility to choose from four heat/cycle selections.

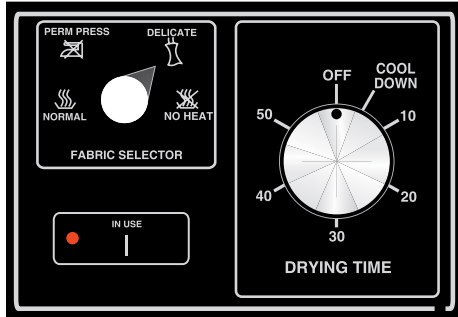

## FEATURES

### SUPERIOR DRYING CONVENIENCE

Industry's largest door opening 2.06 sq. ft. (1914 cm<sup>2</sup>).

### EFFICIENT DRYER HEATING

With 25,000 BTU (gas models) and up to 5,350 Watts (electric models), Speed Queen dryers offer some of the fastest drying times in the industry.

### UPFRONT LINT FILTER

Easy to clean and secured.

### REVERSIBLE DOOR

For installation flexibility.

# STACK DRYER

The Speed Queen stack dryer offers the same great features as the single load dryer. Two commercial dryers in the space of one, both operating independently, including independent controls for optimum usage.



## FEATURES

### GRAPHIC ARROWS

On control indicate upper and lower pockets.

100% SERVICEABLE FROM THE FRONT

# PUSH-TO-START CONTROL COMMERCIAL WASHER & DRYER SPECIFICATIONS

	Top Load Washers	Single Load Dryers	Stack Dryers
	SWNMN2P SWNMN2S	Electric: SDE807 Gas: SDG809	Electric: SSE807 Gas: SSG809
Basket/Cylinder Volume - cu.ft. (liters)	2.8 (79)	7.0 (198)	7.0 (198) ea 14 (396) total
Width - in (mm)	25 5/8" (651)	26 7/8" (683)	26 7/8" (683)
Depth - in (mm)	28" (711)	28" (711)	28" (711)
Height* - in (mm)	43" (1092)	43" (1092)	76 5/8" (1946)
Weight - lb (kg)	190 (86)	Electric: 135 (61) Gas: 140 (64)	Electric: 265 (120) Gas: 275 (125)
Shipping Weight - lb (kg)	210 (95)	Electric: 145 (66) Gas: 150 (68)	Electric: 280 (127) Gas: 290 (132)
Cycle Time - minutes (default)	31	45	45 ea
Motor HP (Capacitor Start and Thermal Protected)	1/2 HP (2 speed)	1/3 HP, 5.5 amps	1/3 HP, 5.5 amps
Water Consumption - gal (Liter)	27.3 (103.4)	N/A	N/A
Water Factor - gal/ft <sup>3</sup> (Liters/Liter/cycle)	8.4 (1.12)	N/A	N/A
Modified Energy Factor - ft <sup>3</sup> /kWh/cycle (Liters/kWh/cycle)	1.65 (46.7)	N/A	N/A
Average Hot Water Usage - gal (Liter)	2.3 (8.8)	N/A	N/A
Water Pressure - psi (bar)	Pressure fill 20 to 120 (1.4/8.3)	N/A	N/A
Spin Speed - RPM	473, 710	N/A	N/A
Cycle/Temperature	Normal Perm Press Delicate	Normal Perm Press Delicate No Heat	Normal Perm Press Delicate No Heat
Electrical Specifications and Circuit Requirements	120/60/1-15 amp	Electric: 120/208/60/1-30 amp 120/240/60/1-30 amp Gas: 120-60/1-15 amp	Electric: 2 ea 120/208/60/1-30 amp 120/240/60/1-30 amp Gas: 2 ea 120-60/1-15 amp
Motor	60 Hz	60 Hz	60 Hz
Btu per Hour (kcal)	N/A	25,000 (6300)	25,000 (6300)
Heating Element**	N/A	4750W, 208V 5350W, 240V	4750W, 208V (2 ea) 5350W, 240V (2 ea)
Type of Gas (Gas models only)	N/A	Factory-equipped natural/mixed gas convertible to LP gas***	Factory-equipped natural/mixed gas convertible to LP gas***
Utility Connections - in (mm)	N/A	Gas: 3/8" NPT (9.5)	Gas: 3/8" NPT (9.5)
Air Outlet Diameter - in (mm)	N/A	4" (102)	4" (102)
Exhaust Airflow† - cfm (liters/sec)	N/A	220 (105)	220 (105)
Maximum Exhaust Static Back Pressure	N/A	0.6" W.C.	0.6" W.C.
Agency Approval	cULus	Electric: cULus Gas: CSA Star	Electric: cULus Gas: CSA Star
Activation	Push-to-Start	Push-to-Start	Push-to-Start
Top and Lid Finish	Porcelain	Porcelain	N/A
Colors	White	White	White
Door Type	Window	Solid	Solid, Window

\* Heights may vary slightly depending on leveling adjustments.

\*\* Electric dryers come equipped for 120/240/60/1 operation. They can be field converted to operate on 120/208/60/1 with optional 61928 conversion kit. Gas dryers can be field converted for operation on LP gas with optional 458P3 conversion kit.

\*\*\* IMPORTANT: Any product revisions or conversions must be made by the Manufacturer's Authorized Dealers, Distributors, or local service personnel.

† Measured at point of exit from dryer.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008.

Printed in the U.S.A.

©Copyright 2012 Alliance Laundry Systems LLC

